

Q22HD系列流量气控管阀
Q22HD Series of Pneumatic Control Valves



Q22HD - 25

系列号 Series Code

接管口径 Joint Pipe Bore

15: G1/2

20: G3/4

25: G1

32: G1 1/4

40: G1 1/2

50: G2

性能特点 Features

该阀启动压力低，关闭灵敏度高，密封性能好，进口方向任意。种类分截止、板式、单双作用控制等多种结构。现广泛应用在食品、医药、工业、洗涤、石化、冶金、喷涂、车辆等机械设备上。


Low starting pressure of the valve, close the high sensitivity, good sealing performance, any imports direction. Category deadline, plate, single and double acting control structure. Now widely used in food, medicine, industry, washing, petrochemical, metallurgy, spray, vehicles and other machinery and equipment.

Q22HD系列流量气控管阀
Q22HD Series of Pneumatic Control Valves



技术参数 Specification

型 号 Model	Q22HD-15	Q22HD-20	Q22HD-25	Q22HD-35	Q22HD-40	Q22HD-50
公称通径 Nominal Diameter	15	20	25	32	40	50
接管口径 Joint Pipe Bore	G1/2	G3/4	G1	G1 1/4	G1 1/2	G2
工作介质 Working Medium	空气、水、油、液化气、轻粘度流体 Air, water, oil, liquefied petroleum gas, lighter viscosity fluid					
工作压力 Working Pressure	0.2~0.6MPa					
介质和环境温度 Medium and Ambient Temperature	-5~60℃，-5~150℃（高温型 High temperature type）					
流量系数KV值 KV Coefficient Values	4	5	10	25	25	40

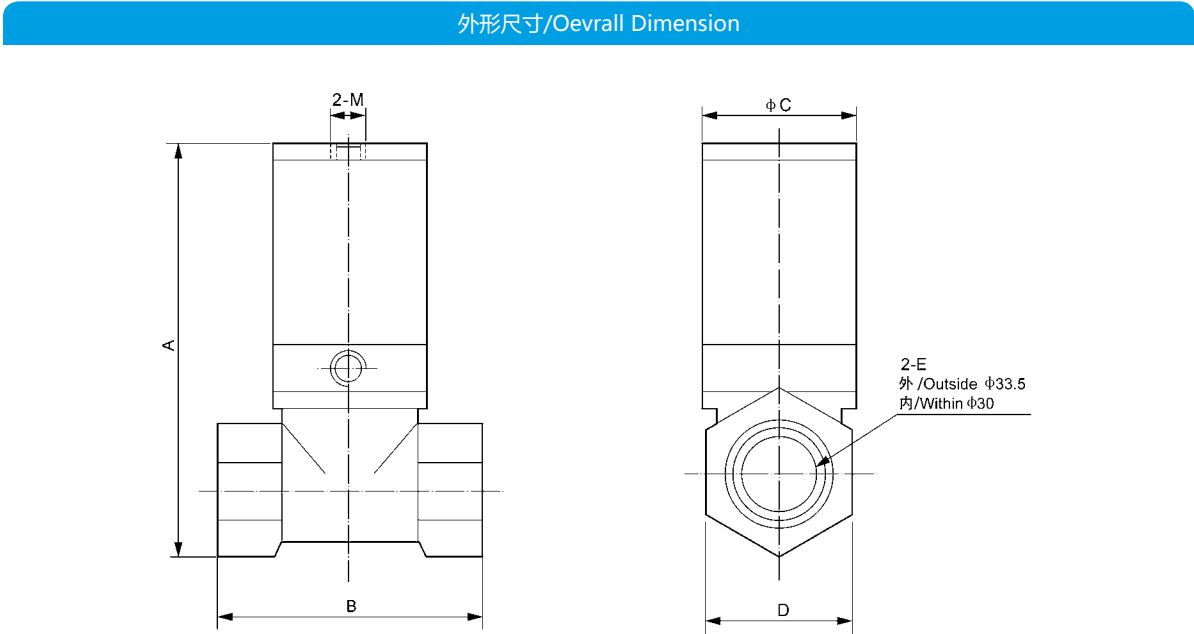

型 号 Model	A	B	C	D	M	E	重量 Weight g
Q22HD-15	96	47	31	26	G1/8	G1/2	250
Q22HD-20	102	54	31	33	G1/8	G3/4	330
Q22HD-25	115	66	38	39.5	G1/8	G1	490
Q22HD-35	143	77	46	48	G1/8	G1 1/4	820
Q22HD-40	160	86	56	54	G1/8	G1 1/2	1050
Q22HD-50	182	116	69	67	G1/8	G2	1680